

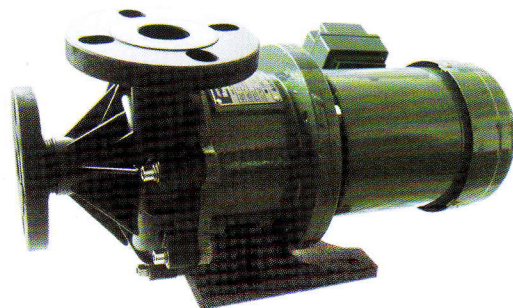


Application


Petrochemical, Chemical Processing, Bulk Unload & Transfer, Plating Recirculation/Filtration, PCB Etching/Rinse, Manufacturing, Underground Storage Tank, Sumps, Top Opening Tank, Pharmaceutical & Photo Processing, Any Hazardous Chemical Applications.




Performance Curve

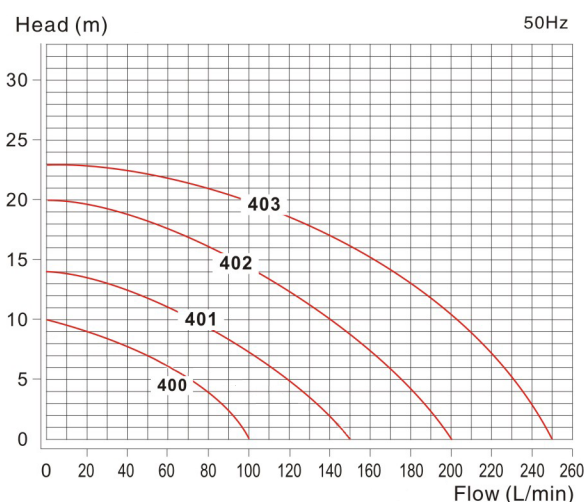


MX-400

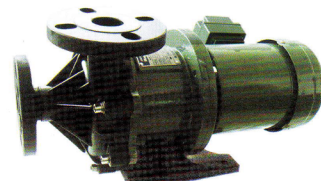

MX-401

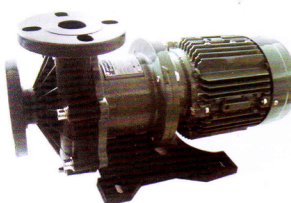

MX-402

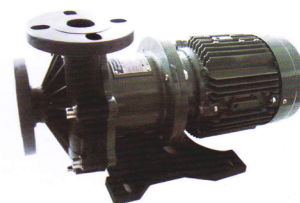

MX-403

> DIMENSIONS

Type	W	H	L	a	b	c	d	e	f	g	i
MX-400	140	255	452	110	54	98	95	130	87	150	12
MX-401	160	255	479	130	75	130	115	140	103	184	12
MX-402	260	280	516	208	80	200	120	160	89	157	14X36
MX-403	260	280	516	208	80	200	120	160	89	157	14X36

Type	Tube interface		Max. Capacity L/min	Max. head m	Temperature °C	Specific weight	Motor	
	Inlet	Outlet					Output W	Phase
MX-400	40	40	100	10.5	0-80	1.2	400	3
MX-401	40	40	150	14.5	0-80	1.2	750	3
MX-402	50	40	200	20	0-80	1.2	1500	3
MX-403	50	40	250	23	0-80	1.2	2200	3

